


Cord Operated Curtain Track System

Silent Gliss® 3900

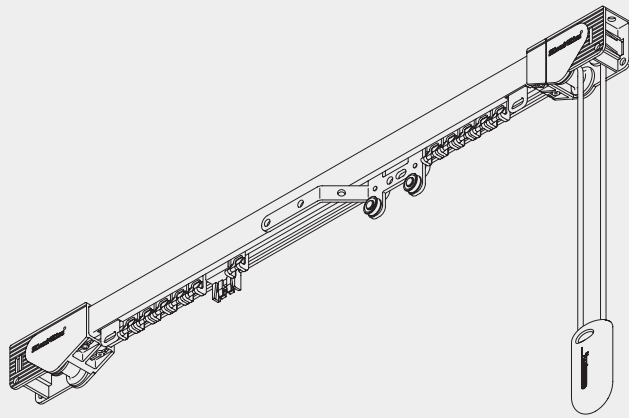


Product Information

- Strong and elegant, the most attractive heavy duty track available.
- Roller glider glides on rim of front channel - no dust and minimum friction - setting new standards of efficiency (up to 20kg in curtain weight).
- Eye of glider is thrown forward to avoid friction with curtain heading yet remains in perfect balance.
- Can also be operated by hand if cord tensioner 3735 is used.
- Roller gliders in strip form for quick assembly.
- Easy ceiling or wall fix.
- Because of enclosed cord channels it can be front or reverse bent, perfect for bay windows.
- Cord drop easily adjusted without dismantling system.
- Can be corded from both ends for extra heavy curtains or where one curtain is wider than the other.
- Standard in white.
- Standard lengths 5m and 6m.
- Standard cord drop 1500mm, right hand pull.
- Can be bent.



3900

Profile, Bending and Specification Information



3982




Std. radius 200mm (Reverse bends 150mm)

Specification Guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 3900 cord operated aluminium curtain track, assembled complete with roller gliders 3911 at 10/metre gliding on front channel rim and eye section protruding forward to prevent friction. Cord-guide/return set 3915, overlap arm 3936 and cord 3090, (cord drop 150cm R.H.S.). Face fixed with nylon bracket 3630/top fixed with nylon bracket 3603 at 600mm centres.

How to Measure

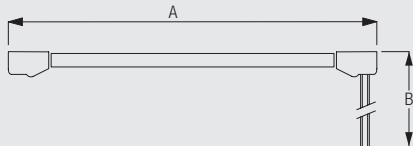

A: system width
B: cord height

System Dimensions



3900



12m



20kg

Max. Curtain Weight Chart


	2 m	4 m	6 m	8 m	10 m	12 m
	8	12	16	15	13	11
	8	14	20	18	15	13
	10	11	11	10	8	7
	10	14	14	13	13	12
	10	11	11	11	10	10
	10	12	12	11	11	10
	8	8	7	6	5	4
	10	10	9	8	7	6

(kg max.)

Straight tracks can be extended beyond 12m by using a connecting bridge and intermediate pulley.


Fitting Information

Bracket positioning

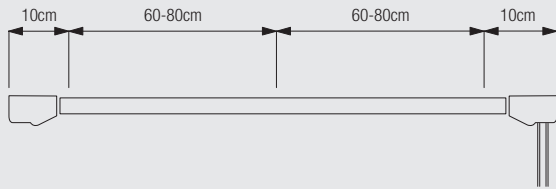

The fixing distances are meant as a guide only, they may vary in practice depending on surface and curtain weight. For heavy duty systems a maximum distance of 600mm is recommended.

Fixing with universal bracket

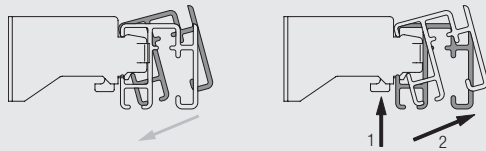


Applicable with 3603/3630/3655/3660

Installation: Roll track onto bracket in direction indicated
Removal: 1. Press to release 2. Rotate forward for removal.


Fitting Options

Ceiling fix with bracket 3603

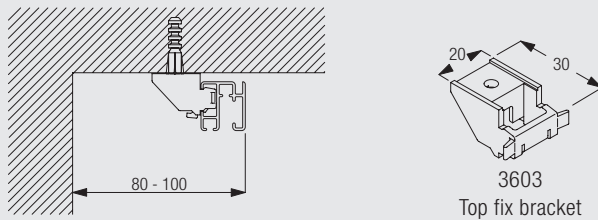

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Ceiling fix with bracket 3603 and double arms 3272/3273/3274

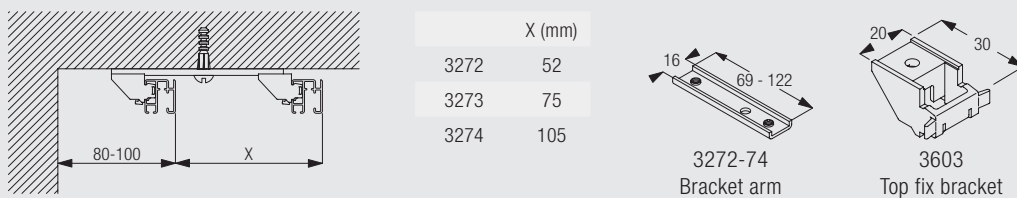


Double arm is threaded for screw M4x8 for fixing the bracket 3603

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.






3900


Suspended fix with bracket 3603 and hanger rod system 3639

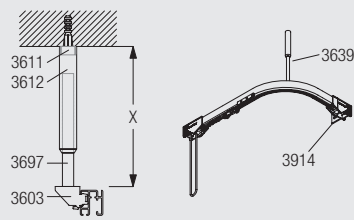




	X (m)
3639	1.25 max.




Wall fix with universal brackets 3630/3655/3660





	X (mm)
3630	47
3655	62
3660	77



Wall fix with brackets 3134-39 and bracket 3603

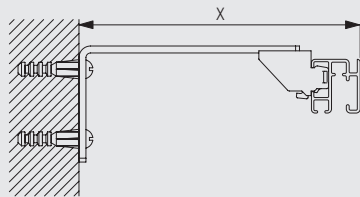


	X (mm)	W (mm)	Y (mm)	Z (mm)
3134	85	-	50	-
3135	105	-	50	50
3136	125	-	50	50
3137	145	-	80	50
3138	175	60	80	60
3139	225	85	80	85






3900

Brackets are threaded for screw 6748 (M4x8) for fixing the bracket 3603

Wall fix with adjustable bracket support 3275-77 and 3603

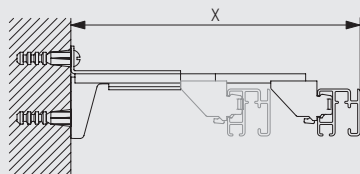

	X (mm)
3275	98-125
3276	117-147
3277	147-177



Brackets 3275-3277 are a combination of bracket support 3271 and bracket arm 3272, 3273 or 3274
Brackets are threaded for screw M4x8 for fixing the bracket

Standard Accessories


0998 Safety Cord Retainer



3090 Cord (ø 3.5mm)





3630 Bracket






3922 Roller 3911 in strip form



















3936	Overlap arm		3982	Profile	
------	-------------	---	------	---------	---

Sets

3915	Cord guide set, containing		3906	Cord guide	2	
			3917	Pilot runner	1	
			3939	Pilot runner	1	

Optional Accessories

18R	Screw 25mm. No. 8 roundhead		0516	Pelmet spacer		
3133	Bracket cover (60mm)		3134	Extension bracket (60mm)		
3135	Extension bracket (80mm)		3136	Extension bracket (100mm)		
3137	Extension bracket (120mm)		3138	Extension bracket (150mm)		
3139	Extension bracket (200mm)		3271	Adjustable bracket base		
3272	Adjustable bracket arm (69mm)		3273	Adjustable bracket arm (92mm)		
3274	Adjustable bracket arm (122mm)		3275	Adjustable extension bracket set (69mm)		
3276	Adjustable extension bracket set (92mm)		3277	Adjustable extension bracket set (122mm)		
3340	Cord/Chain weight (not for use with 4845 metal bead chain)		3603	Top fix bracket		
3620	Connecting bridge		3639	Hanger rod assembly		
3655	Long universal bracket		3660	Extra long universal bracket		
3735	Cord tensioner with spring		3799	Cord Tidy		
3914	Bracket for return profile		3916	Pilot runner (for multi-stack)		

3929 Intermediate pulley



3932 Spring stop



3935 Straight overlap arm



6748 Cheese head machine screw (M4)


3133L Extended bracket cover for 3138/9



Sets

3639 Hanger rod assembly

3697 Rod 1



3611 Stud 1




3612 Support with screw 1



3699 Track insert 1



Sewing Information and Accessories



3900

3582 Hook



3599 Hook

