



Top-mounted roller shutters for new buildings

Perfect integration

Der SonnenLichtManager

Their excellent thermal insulation and sound absorbing coefficients make top-mounted roller shutters for new buildings an effective solution for both new buildings and refurbishments. The flexible window connection offers new and innovative possibilities through the new optional clip system, enhancements of the window frame profile and static-optimising models. The boxes of the top-mounted roller shutters for new buildings are available both for masonry and for clinker brick facades.


Features

max. width*	3,500 mm
max. height*	3,500 mm
max. area*	10 m ²
Drive	Belt, crank, motor, radio motor
Roller shutter curtain	Aluminium or plastic
Box	For wall thicknesses of 240, 300, 345 (clinker brick only) and 365 mm available for clinker brick or masonry facades
Fields of application	New buildings, renovations, when replacing windows
Installation	Together with the window
Equipment extras*	Diverse static solutions, integration of ventilation elements

*depending on type and equipment

The benefits for you

- Perfect integration into the facade
- Economical installation together with the window
- Inspection possible from inside or outside
- Outstanding insulating properties
- No lintel structure required above the window
- Combination with top-mounted external venetian blinds for new buildings possible

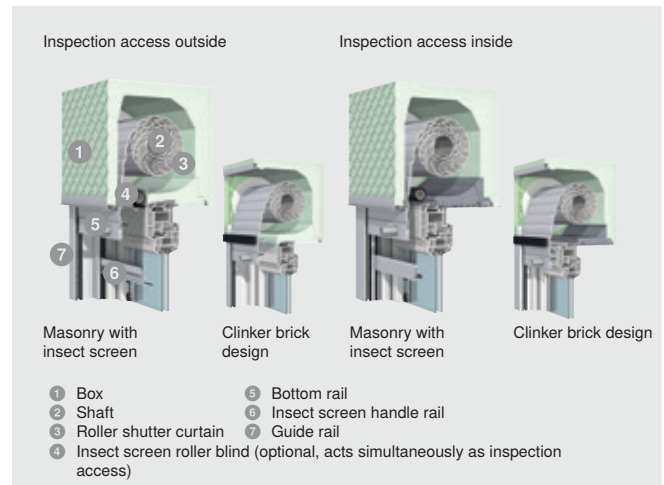

Brilliant extras

- Upon request, window connection via clip fixing
- Integrated fall protection VisioNeo
- WAREMA SecuKit
- Integrated insect screen