

BetaScreen® 200



Roller blinds



Panel blinds



Rooflight blinds

Product Data 1% 3%

Composition	100% Thermoplastic Olefin	
Width	1600mm, 2500mm	
Thickness	0.83mm	0.78mm
Weight	496gsm	464gsm
Openness Factor	1%	3%
Fire rating	BS5867 2008 Part 2 Type B	
Cleaning	Soapy water	

5% openness fabric is also available. Please contact us for further details.

Thermal Control Values


1%						3%					
Colour	Code	Tv	Ts	Rs	As	Colour	Code	Tv	Ts	Rs	As
Midnight	BS20011	2%	1%	63%	93%	Midnight	BS20013	5%	3%	6%	91%
Nickel	BS20021	7%	8%	37%	55%	Nickel	BS20023	8%	9%	36%	55%
Stone	BS20031	11%	13%	55%	32%	Stone	BS20033	11%	12%	52%	36%
Almond	BS20041	12%	15%	61%	24%	Almond	BS20043	15%	17%	61%	22%
Cotton	BS20051	18%	20%	68%	12%	Cotton	BS20053	19%	20%	70%	10%

Glare control Tv = % of visible light transmitted through fabric
 Thermal control As = % of solar energy absorbed by fabric
 Rs = % of solar energy reflected by fabric
 Ts = % of solar energy transmitted through fabric

Properties


- Thermal comfort
- Long life
- Visual comfort
- Flame retardant
- Easy to clean
- Recyclable
- Tear resistance
- Through visibility
- PVC free
- Fabric can be joined

Size Parameters

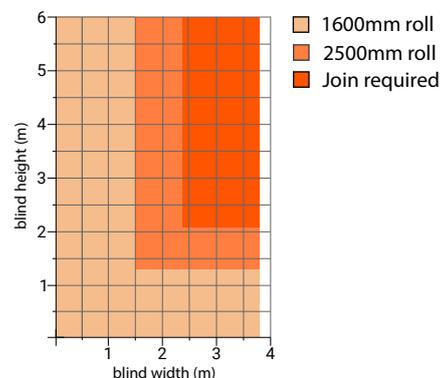


For further information, contact us on 01252 737973 or visit www.waverley.co.uk


Visit www.waverley.co.uk for further technical information




Midnight




Nickel



Stone



Almond



Cotton

For further information, contact us on 01252 737973 or visit www.waverley.co.uk

Visit www.waverley.co.uk for further technical information